

BD_SW_2B_05 2 button handlebar race switches

This switch set may be fitted to any race or road motorcycle. Two individual sealed switches are held in a machined aluminium enclosure offering high levels of crash protection as well as electrical integrity.

The user is free to choose the colour and type of switch in either of the two locations at the time of ordering. Also available without laser engraving.

Although supplied without any connector, we can fit almost any connector as an extra cost.

This switch may only be used for switching a current maximum of 3 ampere. Typically Kill switch and starter via relay. Not to be used as the primary ignition switch.




Switch types

Fill in the form below using the choices indicated, the default selections are shown in (brackets).

- **Switch type** – Momentary or latching
- **Switch colour** – Black / Blue / Green / Red / White / Yellow

	Switch type	Colour
1	(Latching)	(red)
2	(momentary)	(black)

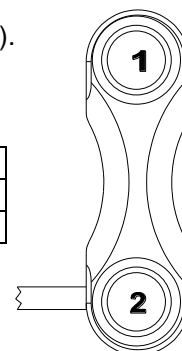

Each switch is independently wired and isolated from all other switches. Alternative wiring arrangements are available on request.

Example layout



Electrical / Mechanical Characteristics

Wire..... Type 55 / 24
 Switch sealing..... IP67
 Housing..... Aluminium
 Coating..... Black anodise

Dia (handlebar)22mm (7/8")
 Max width 20.5 mm
 Min width at centre 13.5 mm
 Weight 80 g

Ordering Information

Part No.	Connector	Cable	Description
BD-SW-2B-05	none	600mm	2 way handlebar switch set to suit all race motorcycles

For alternative switch arrangements and wiring please contact us:

- Single or dual pole switches
- Custom wire lengths
- Custom connectors
- 4 and 5 button switch sets
- Custom laser engraving